



Ideas: Photoelectrochemical carbon removal as negative emission technology

Matthias M. May^{1,2} and Kira Rehfeld^{3,4}

¹Department of Chemistry, University of Cambridge, Lensfield Road, CB2 1EW, Cambridge, United Kingdom

²Institute for Solar Fuels, Helmholtz-Zentrum Berlin für Materialien und Energie, Hahn-Meitner Platz 1, 14109 Berlin, Germany

³British Antarctic Survey, High Cross, Madingley Road, CB3 0ET, Cambridge, UK

⁴Institute of Environmental Physics, Ruprecht-Karls-Universität Heidelberg, Im Neuenheimer Feld 229, 69120 Heidelberg, Germany

Correspondence: MM May (matthias.may@physik.hu-berlin.de)

Abstract. The pace of the transition to a low-carbon economy – especially in the fuels sector – is not high enough to achieve the 2°C target limit for global warming by only cutting emissions. Most political roadmaps to tackle global warming implicitly rely on the timely availability of mature negative emission technologies, which actively invest energy to remove CO₂ from the atmosphere and store it permanently. The models used as a basis for decarbonisation policies typically assume an implementation of such large-scale negative emission technologies starting around the year 2030, ramped up to cause net negative emissions in the second half of the century and balancing earlier CO₂ release. On average, a contribution of -10 Gt CO₂/year is expected by 2050. (Anderson and Peters, 2016) A viable approach for negative emissions should (i) rely on an unlimited source of energy (solar), (ii) result in a safely storable product (e.g. liquid or solid, not gaseous), (iii) be highly efficient in terms of water and energy use, to reduce the required land area and competition with water and food demands of a growing world population and (iv) be large-scale feasibility and affordability.

Processes for the extraction of CO₂ from the atmosphere are energy-intensive. This energy has to be supplied by low- or zero-carbon sources. At present, primarily direct air capture and biomass production are explored (Smith et al., 2016). Renewably driven direct air capture is believed to be expensive and has not yet demonstrated scalability. Therefore, the currently most feasible option appears to be the use of natural photosynthesis to generate biomass through afforestation or ocean fertilization. Grown plants are then permanently stored, building a new stock of fossil fuels. Alternatively, the plant material can be combusted with carbon capture and storage to act as a low-carbon fuel. However, the efficiency of natural photosynthesis drops at high light conditions and because a significant fraction of the energy is used for the metabolism (Melis, 2012), the storage of solar energy in biomass is limited to 2-3% efficiency. Therefore large areas of agricultural land would be required for the achievement of the negative emission goals: The removal of one Gt CO₂/year can demand more than 1 million km², the combined area of Germany and France (Smith et al., 2016). Scaling biomass production to the required 10 Gt CO₂/year is hence unlikely to be compatible with planetary constraints (Heck et al., 2018).



We suggest to employ photoelectrochemical CO₂ reduction, also called *artificial photosynthesis*. As in its natural counterpart occurring in plants, photons in the artificial photosynthesis process excite charge-carriers, which then reduce (and oxidise) reactants in a liquid electrolyte to solar fuels. The photon energy is only briefly converted to electron energy, and then stored in molecular bonds. Light is absorbed in synthetic materials such as semiconductors or dyes and the chemical conversion typically takes place at (co)catalysts at the interface between electrolyte and light absorber. We primarily focus on tightly integrated photoelectrochemical systems, where the absorber is immersed into the electrolyte. While this approach imposes restrictions on the light absorber design, the tight integration also promises cost benefits (Kirner et al., 2016).

Artificial photosynthesis already delivers fivefold higher efficiencies than natural photosynthesis, as 13% for CO₂ reduction and 19% for solar water splitting have recently been demonstrated, (Schreier et al., 2017; Cheng et al., 2018) more than half of the theoretical limits. Using solar fuels, either hydrogen or carbon-based from CO₂ reduction, would cut greenhouse gas emissions. However, while the combustion product of hydrogen is water, using renewably generated carbon-based fuels releases the captured greenhouse gas back into the atmosphere. Recapturing the CO₂ from the atmosphere would be energy-intensive and hereby lower the overall carbon reduction efficiency, which is why solar energy-driven water splitting may be the preferable fuel, eliminating carbon completely from the energy system (Parkinson, 2016). Photoelectrochemical CO₂ reduction could, therefore, be better placed to generate carbon-rich products that can safely and permanently store carbon extracted from the atmosphere. The electrochemical reactions have to be chosen to generate products that can be stored safely below-ground over thousands of years. This leaves us with liquids or solids, since gases, such as CO₂ itself, can leak back into the atmosphere (Damen et al., 2006). The handling of a solid product in an efficient flow-cell reactor is not practical. Therefore, the production of carbon-rich liquids, such as alcohols or (fatty) acids, is most promising. These could be stored in underground reservoirs such as depleted oil fields, but also used as precursors for organic construction materials.

Any competitive artificial approach should provide a significantly higher turnover than natural photosynthesis. To assess the technologies, their efficiency for carbon removal has to be estimated and compared. The typically used solar-to-fuel efficiency (May et al., 2017) is not suitable, as it only describes the relative fraction of incident solar radiation that is converted to chemical energy. Instead, negative emission technologies based on solar energy are better assessed by the *solar-to-carbon* (STC) efficiency, which we define as the ratio of converted CO₂ molecules to the incoming photon flux (Appendix A).

Our calculations in the following were performed under the – highly idealised – assumption that the overpotential is dominated by the oxygen evolution reaction for a very good catalyst, which can be justified for water splitting. CO₂ reduction with the currently available catalysts, on the other hand, is associated with significantly higher overpotentials. The direct impact of catalysis performance on achievable efficiencies can be seen in Figure 1(a-b), where obtainable STC efficiencies and resulting module areas are plotted as a function of Tafel slope and exchange current density.

Artificial solar energy conversion does – unlike natural photosynthesis – not suffer from an efficiency decrease due to high light conditions, as beneficial effects of light concentration on the solar cell and higher temperatures on catalysis can overcompensate the detrimental effect of temperature on the absorber. Hence, near-equatorial regions with high solar irradiation are viable target areas for its deployment. Under the assumption of 3500 kWh/m² available per year for a 2-axis tracker in the Sahara desert region (Amillo et al., 2014), we can estimate the required module area for the 2050 negative emission target of

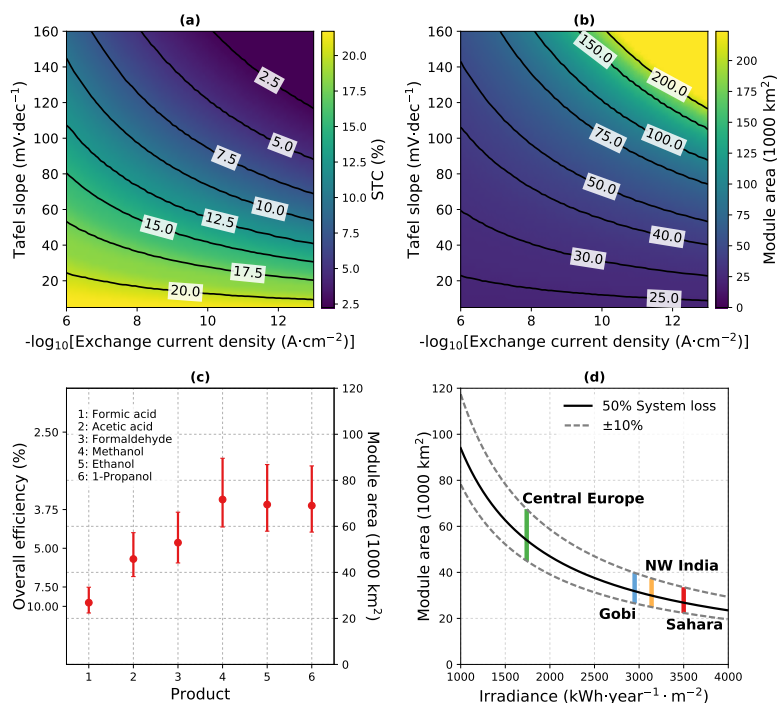


Figure 1. Theoretical efficiency limits and module area for the -10 Gt CO₂/year scenario. (a) STC efficiency limit of a dual-junction absorber for formic acid (without system loss) as a function of exchange current density and Tafel slope. (b) Resulting module area at Sahara irradiance and 50% system loss. (c) STC efficiency and module area required under Sahara irradiance for different products at 50% system loss. Error bars indicate 40 and 60% loss, respectively. (d) Module area for formic acid production over the yearly irradiance at 50% (solid line), as well as 40 and 60% (dashed lines) system loss. Vertical lines mark typical irradiances accessible to a 2-axis tracker.

10 Gt CO₂/year. At a maximum STC efficiency of ca. 19%, this would be approximately 13,500 km². Under the conservative assumption that for a mature technology the overall system efficiency is half of the theoretical efficiency, this translates to an areal requirement of about 27,000 km² (Fig. 1a). The typical space factor for tracking photovoltaics of 0.2, (Araki et al., 2016) finally leads to a land footprint of ca. 135,000 km². Other desert areas such as the Gobi desert, or the Thar desert in north-western India, would also be interesting regions. In areas such as central Europe, a lower irradiance translates to larger footprints (Fig. 1b). The scale of such an effort, if one tried to realize it in a single project, would be considerable and about one order of magnitude larger than the previously largest project for solar electricity production in the Sahara desert. However, it could be realized alongside with biomass approaches in other world regions, as it does not rely on agriculturally usable land. With the 2°C target, there is a truly global incentive to realise such an undertaking. Especially if spread over several projects, the economic added value would be created in the regions that suffer most under global warming.

Carbon removal by artificial photosynthesis is water-efficient, compared to its natural counterpart, as water is only used as chemical precursor and not evaporated from the closed system. Considering formic acid as product to be stored, and the



target of 10 Gt CO₂/year to be removed, the water demand is about 4.1 Gt/year. This would be a substantial amount in dry regions. Desalination of seawater would be possible, albeit energetically inconvenient. However, the direct use of seawater was already demonstrated for electrochemical hydrogen production (Fukuzumi et al., 2017), and might therefore also be possible for CO₂ reduction. Another challenge is that high-efficiency carbon sinks concentrated in large-scale facilities could, in principle, suffer from mass transport limitations of dilute CO₂ in the atmosphere. This could be alleviated by selecting sites with high atmospheric convection rates, by spacing facilities sufficiently widely apart, or to combine them with solar updraft towers for electricity generation.

In principle, electrochemical reduction of CO₂ would also be possible using photovoltaics or wind power to first generate electricity, and then drive electrolysis and the chemical conversion. This introduces the intermediate step of converting solar to electrical energy. Unlike solar energy, however, large-scale mechanical wind extraction from the atmosphere might be limited. (Miller et al., 2011) Hybrid approaches, where inorganic solar cells are combined with bacteria, are also possible. (Liu et al., 2015) but efficiencies are currently low and it is unclear how the drop in production rate under high illumination conditions can be overcome.

Artificial photosynthesis in the form of CO₂ reduction represents an interesting technological option for negative emissions due to its high efficiency. This would greatly reduce land use for the anticipated 2050 negative emission target compared to so far considered – mainly biomass-based – technologies. The installation of the required minimum module area of about 30,000 km² would, however, still be an enormous undertaking. While we estimate the costs for photoelectrochemical CO₂ removal to roughly 65 Eur per ton, we emphasize that the development stage of highly efficient photoelectrochemical CO₂ conversion does not yet allow a robust estimate of the costs, rendering this value rather speculative. Physical feasibility and technological challenges can, however, already be anticipated. The greatest challenges to overcome towards the application are, for now, to develop and implement systems that are stable under operating conditions, as well as the derivation of earth-abundant, efficient catalysts (Schreier et al., 2017; Cheng et al., 2018).

Code availability. Calculations were performed with YaSoFo, the source code is available under <https://bitbucket.org/YaSoFo/>. The python source code to reproduce the calculations will be made available online.

25 Appendix A: Solar-to-carbon efficiency measure

Given a PEC device and a target sink product, we define the STC efficiency by the ratio of carbon atoms, which are chemically fixed, over the incoming photon flux, j_{ph} , given by the integrated solar spectrum. The STC efficiency limit for an ideal photoelectrochemical solar cell can then be calculated as follows: The Gibbs free energy difference per electron, ΔG , constitutes the electrochemical load of the cell. It limits, together with the terrestrial solar spectrum, $n(\lambda)$, the electronic current density, j_e . Tandem solar cells are required for high efficiencies in photoelectrochemical energy conversion as they provide high currents and sufficient voltage to drive the reaction. The current density of an ideal tandem absorber with very good catalysts can be



calculated in the detailed-balance-scheme.(May et al., 2017) The selected product then defines the electron efficiency, η_e , i.e. how many electrons are consumed for the formation of one product molecule from CO_2 and water. With the Faradaic efficiency η_F , describing the efficiency of the conversion from current to desired product, the STC can be formulated as:

$$\text{STC} = \eta_F \eta_e \min_i \left[\frac{\int_{\lambda_i}^{\lambda_{i+1}} n(\lambda) d\lambda}{\int_0^{\infty} n(\lambda) d\lambda} \right] \text{STC} = \frac{\eta_F \eta_e j_e}{j_{ph}}$$

5 For formic acid (HCOOH , $\Delta G = 1.4 \text{ eV}$, $\eta_e = 0.5$), these idealised assumptions result in a maximum electronic photocurrent density of $j_e \simeq 26 \text{ mAcm}^{-2}$. For unity Faradaic efficiency, we obtain a product current density equivalent of $\eta_e j_e = 13 \text{ mAcm}^{-2}$. It follows that ideally ca. 19% of the incoming solar photons transform a CO_2 molecule to the liquid – and hence storable – product. The STC efficiency would therefore be 19%. Taking into account photoconversion, Faradaic, and system losses, values of 10% STC or more appear feasible. This is high compared to the currently achieved energetic efficiencies for
10 natural photosynthesis of 2-3%, which translate to roughly 1.5-2% STC efficiency.

STC efficiencies are a function of the reaction path, similar to CO_2 reduction for fuel generation, where the obtainable efficiency depends on the Gibbs free energy.(May et al., 2017) The distribution of energy over the chemical bonds varies for different products, yet for CO_2 removal, we are primarily interested in the number of converted CO_2 molecules. Therefore, the STC efficiencies can deviate significantly for products that have a similar energetic efficiency (Fig. 1a). Feasible products
15 are associated with distinct storage requirements, but also different catalysts. Acetic acid, for instance, could be an interesting option for long-term storage because of its high melting point. Though the electronic photocurrent could be higher than for formic acid due to a reduced electrochemical load, 4 electrons are required for the conversion of one CO_2 molecule, which in the end almost halves the efficiency. The theoretical efficiency limit, as shown in Figure 1a, largely varies based on the number of electrons consumed per CO_2 molecule, which is 2 for formic acid, 4 for acetic acid and formaldehyde, and 6 for methanol,
20 ethanol, and 1-propanol. Therefore, using the carbon conversion rate as the benchmark for negative emissions will result in a different choice of product compared to solar fuels, where energetic considerations dominate.

Appendix B: Cost estimate

To roughly estimate the costs of negative emissions by photoelectrochemical CO_2 reduction, we assume the module costs to be twice the module costs (Chang et al., 2018) of current crystalline silicon photovoltaics. With a depreciation period of 20 years,
25 and running costs of 10% of the investment sum, this would translate to 55.60 Eur per ton CO_2 . Additional costs can arise from the diffusion limitation due to the high conversion rate, which might necessitate to technically create convection by means of mechanical fans. The energy costs of capturing atmospheric CO_2 are estimated to be about 30-88 kJ mol^{-1} .(Goepfert et al., 2012) With an average of 50 kJ mol^{-1} and a current photovoltaic electricity price of 30 Eur/MWh, this adds another 9.50 Eur/ton, finally totalling 65 Eur/ton.



Competing interests. There are no conflicts to declare.

Acknowledgements. We thank the German Research Foundation (code RE3994-1/1 and RE3994-3/1, for KR) and the fellowship programme of the German National Academy of Sciences Leopoldina, grant LPDS 2015-09 (MM) for funding. Gregor Schwerhoff, Carl Poelking, and Klaus Pfeilsticker are acknowledged for comments on the manuscript.



References

- Amillo, A. G., Huld, T., and Müller, R.: A New Database of Global and Direct Solar Radiation Using the Eastern Meteosat Satellite, Models and Validation, *Remote Sens.*, 6, 8165–8189, <https://doi.org/10.3390/rs6098165>, 2014.
- Anderson, K. and Peters, G.: The trouble with negative emissions, *Science*, 354, 182–183, <https://doi.org/10.1126/science.aah4567>, 2016.
- 5 Araki, K., Nagai, H., Ikeda, K., Lee, K. H., and Yamaguchi, M.: Optimization of Land Use for a Multitracker System Using a Given Geometrical Site Condition, *IEEE J. Photovolt.*, 6, 960–966, <https://doi.org/10.1109/JPHOTOV.2016.2569443>, 2016.
- Chang, N., Ho-Baillie, A., Wenham, S., Woodhouse, M., Evans, R., Tjahjono, B., Qi, F., Chong, C. M., and Egan, R. J.: A techno-economic analysis method for guiding research and investment directions for c-Si photovoltaics and its application to Al-BSF, PERC, LDSE and advanced hydrogenation, *Sust. En. Fuels*, 2, 1007–1019, <https://doi.org/10.1039/C8SE00047F>, 2018.
- 10 Cheng, W.-H., Richter, M. H., May, M. M., Ohlmann, J., Lackner, D., Dimroth, F., Hannappel, T., Atwater, H. A., and Lewerenz, H.-J.: Monolithic Photoelectrochemical Device for 19% Direct Water Splitting, *ACS Energy Lett.*, 3, 1795–1800, <https://doi.org/10.1021/acseenergylett.8b00920>, 2018.
- Damen, K., Faaij, A., and Turkenburg, W.: Health, Safety and Environmental Risks of Underground CO₂ Storage – Overview of Mechanisms and Current Knowledge, *Clim. Change*, 74, 289–318, <https://doi.org/10.1007/s10584-005-0425-9>, 2006.
- 15 Fukuzumi, S., Lee, Y.-M., and Nam, W.: Fuel Production from Seawater and Fuel Cells Using Seawater, *ChemSusChem*, 10, 4264–4276, <https://doi.org/10.1002/cssc.201701381>, 2017.
- Goeppert, A., Czaun, M., Surya Prakash, G. K., and Olah, G. A.: Air as the renewable carbon source of the future: an overview of CO₂ capture from the atmosphere, *Energy Environ. Sci.*, 5, 7833–7853, <https://doi.org/10.1039/C2EE21586A>, 2012.
- Heck, V., Gerten, D., Lucht, W., and Popp, A.: Biomass-based negative emissions difficult to reconcile with planetary boundaries, *Nat. Clim. Change*, 8, 151–155, <https://doi.org/10.1038/s41558-017-0064-y>, 2018.
- 20 Kirner, S., Bogdanoff, P., Stannowski, B., van de Krol, R., Rech, B., and Schlattmann, R.: Architectures for scalable integrated photo driven catalytic devices-A concept study, *Int. J. Hydrogen Energy*, 41, 20 823 – 20 831, <https://doi.org/10.1016/j.ijhydene.2016.05.088>, 2016.
- Liu, C., Gallagher, J. J., Sakimoto, K. K., Nichols, E. M., Chang, C. J., Chang, M. C. Y., and Yang, P.: Nanowire–Bacteria Hybrids for Unassisted Solar Carbon Dioxide Fixation to Value-Added Chemicals, *Nano Lett.*, 15, 3634–3639, <https://doi.org/10.1021/acs.nanolett.5b01254>, 2015.
- 25 May, M. M., Lackner, D., Ohlmann, J., Dimroth, F., van de Krol, R., Hannappel, T., and Schwarzborg, K.: On the Benchmarking of Multi-Junction Photoelectrochemical Fuel Generating Devices, *Sust. En. Fuels*, 1, 492–503, <https://doi.org/10.1039/C6SE00083E>, 2017.
- Melis, A.: Photosynthesis-to-fuels: from sunlight to hydrogen, isoprene, and botryococcene production, *Energy Environ. Sci.*, 5, 5531–5539, <https://doi.org/10.1039/C1EE02514G>, 2012.
- 30 Miller, L. M., Gans, F., and Kleidon, A.: Estimating maximum global land surface wind power extractability and associated climatic consequences, *Earth Syst. Dyn.*, 2, 1–12, <https://doi.org/10.5194/esd-2-1-2011>, 2011.
- Parkinson, B.: Advantages of Solar Hydrogen Compared to Direct Carbon Dioxide Reduction for Solar Fuel Production, *ACS Energy Lett.*, 1, 1057–1059, <https://doi.org/10.1021/acseenergylett.6b00377>, 2016.
- Schreier, M., Héroguel, F., Steier, L., Ahmad, S., Luterbacher, J. S., Mayer, M. T., Luo, J., and Grätzel, M.: Solar conversion of CO₂ to CO using Earth-abundant electrocatalysts prepared by atomic layer modification of CuO, *Nat. Energy*, 2, 17 087, <https://doi.org/10.1038/nenergy.2017.87>, 2017.
- 35



5 Smith, P., Davis, S. J., Creutzig, F., Fuss, S., Minx, J., Gabrielle, B., Kato, E., Jackson, R. B., Cowie, A., Kriegler, E., van Vuuren, D. P., Rogelj, J., Ciais, P., Milne, J., Canadell, J. G., McCollum, D., Peters, G., Andrew, R., Krey, V., Shrestha, G., Friedlingstein, P., Gasser, T., Grubler, A., Heidug, W. K., Jonas, M., Jones, C. D., Kraxner, F., Littleton, E., Lowe, J., Moreira, J. R., Nakicenovic, N., Obersteiner, M., Patwardhan, A., Rogner, M., Rubin, E., Sharifi, A., Torvanger, A., Yamagata, Y., Edmonds, J., and Yongsung, C.: Biophysical and economic limits to negative CO₂ emissions, *Nat. Clim. Change*, 6, 42–50, <https://doi.org/10.1038/nclimate2870>, 2016.